

Axygen® Brand Equipment Product Selection Guide

AXYGEN®

A Corning Brand

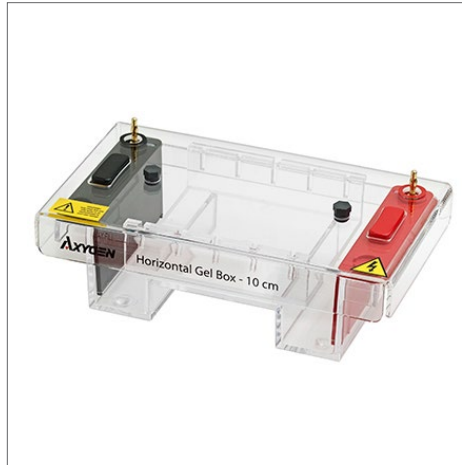


Table of Contents

| | |
|--|----|
| Axygen® Gel Documentation Systems | 1 |
| Axygen Horizontal Gel Boxes | 4 |
| Axygen Power Supplies | 7 |
| Axygen MaxyGene II Thermal Cyclers | 9 |
| Axygen PlateMax™ Semi-automatic Plate Sealers | 11 |
| Axygen Axyspin Refrigerated Microcentrifuges | 13 |
| Axygen Axyspin Mini Plate Spinner Centrifuges | 14 |
| Axygen Axypet® Pro Single- and Multi-Channel Pipettors | 15 |
| Axygen Axypet Single- and Multi-channel Pipettors | 16 |
| Axygen MotoPet™ Pipet Controller | 18 |
| Axygen Storage Boxes and Microcentrifuge Tube Rack | 19 |

Product Ordering Information

For information on Purchasing Options, Terms and Conditions of Sale, Return and Repair Policies, and Warranty/Guarantee Registration, visit www.corning.com/how-to-buy.

Axygen® Gel Documentation Systems



Axygen Gel Documentation System-BL



Axygen Gel Documentation System

Axygen Gel Documentation systems easily capture publication quality, 16 bit TIFF images. The systems are quick to set up and have an intuitive user interface for image capture, annotation, and contrast adjustment. Images are easily saved and opened in common gel analysis software for more detailed analysis.

- ▶ Auto exposure—you never have to manually manipulate the camera
- ▶ Ready-to-use—just connect the computer* and load the software
- ▶ Long-life dual wavelength transilluminators
- ▶ Exceptionally high resolution (5.4 MP) camera
- ▶ The cabinet is compact with an ultra-violet (UV) cut-off switch to prevent exposure to UV light if the cabinet door is opened while the UV light is on.

Choose from Two Axygen Gel Documentation Systems

The **Axygen Gel Documentation System** is an ideal system for labs that want good value without compromising ease of use or image quality. It includes a dual-wavelength transilluminator, 5.4 MP image resolution camera, and image acquisition software (PC not included).

The **Axygen Gel Documentation System-BL** has all the features of the standard Axygen Gel Documentation system, as well as built-in blue lights and a built-on Microsoft® Windows® tablet. The blue lights are designed for use with EtBr replacement dyes to prevent damage to DNA that will be excised for subsequent analysis.


Features

- ▶ Darkroom tab lets you select from UV 302, UV 365, Epi White, or Epi Blue (BL system only) light sources, as well as an optional Trans White light illumination tray.
- ▶ Auto Exposure tool calculates the optimal exposure time with just a single click. You can also use the Slider tool to manually adjust the exposure time and view an updated live image.
- ▶ Select ROI tool allows you to select a region of interest. The Auto Exposure calculations are only based on the selected region. This feature is especially useful for gels that have either intense or faint bands.
- ▶ Band Excision tool allows you to temporarily override the safety precautions in the system to view the gel with the lights on.**
- ▶ Imaging tools include crop, rotate, resize, contrast, saturation, and zoom. Annotation tools include a variety of text and drawing tools. Finished images can be saved, printed, emailed, or exported for further analysis.
- ▶ Transillumination bulbs last for 30,000 hours—which equals over 3.5 years if the bulbs were in continuous use.

*BL model includes tablet computer with software already included.

**Always wear protective eyewear when working with UV light.

Everything You Expect From a High Resolution Gel Doc System—Except the High Price.

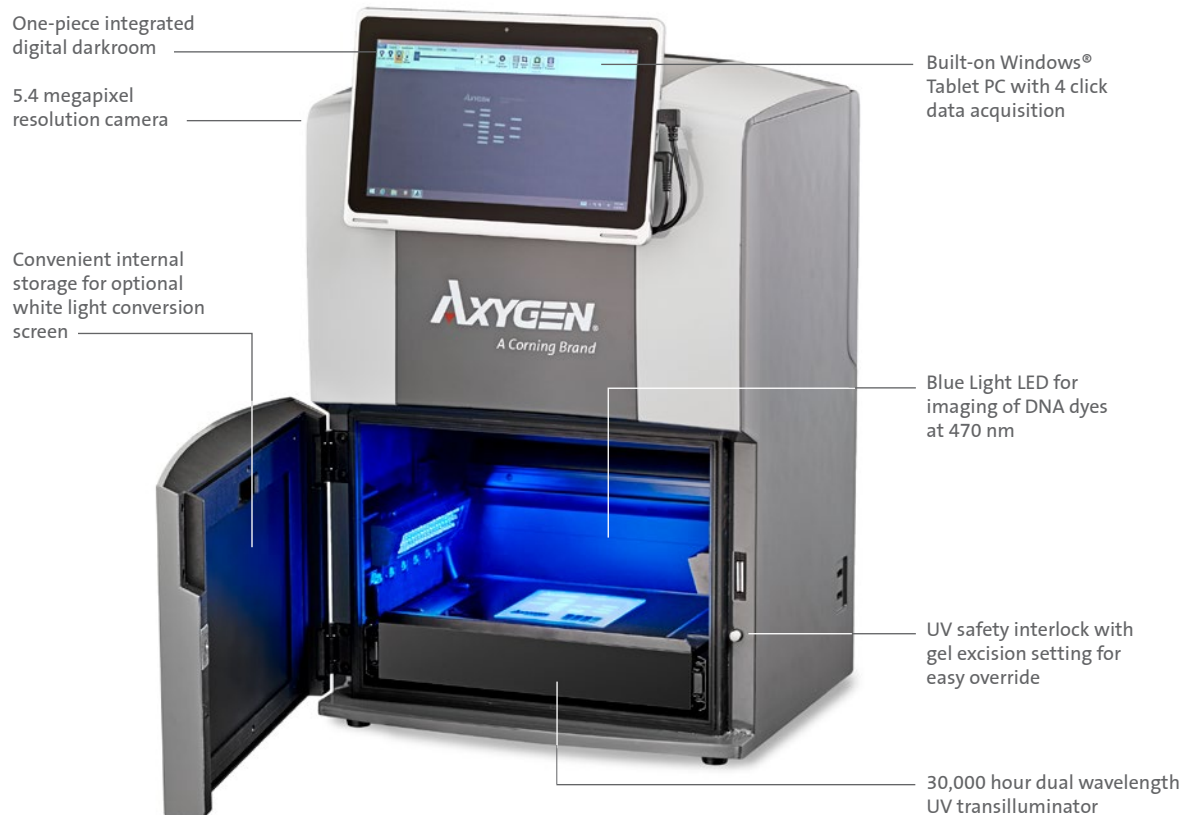

Axygen® Gel Documentation System-BL

Specifications

| Axygen System | Gel Documentation System | Gel Documentation System-BL |
|--------------------------|---|--|
| Camera | 5.4 MP image resolution | 5.4 MP image resolution |
| Lens | f1.8 | f1.8 |
| Light Sources | <ul style="list-style-type: none"> ▶ Epi White ▶ Dual wavelength transillumination at 302 nm and 365 nm | <ul style="list-style-type: none"> ▶ Epi White ▶ Dual wavelength transillumination at 302 nm and 365 nm ▶ Epi Blue |
| Field of View | 15 cm x 20 cm | 15 cm x 20 cm |
| Cabinet | <ul style="list-style-type: none"> ▶ Door sensor to prevent accidental exposure to UV; automatically shuts off UV light when door is open ▶ Safety override, enabling band cutting on the UV transilluminator with automatic turn off after 5 minutes | <ul style="list-style-type: none"> ▶ Door sensor to prevent accidental exposure to UV; automatically shuts off UV light when door is open ▶ Safety override, enabling band cutting on the UV transilluminator with automatic turn off after 5 minutes |
| Emission Filter | 590 nm | 590 nm |
| 3-position Filter Slider | No | Yes |
| Certifications | CE, cTUVus | CE, cTUVus |
| Product Footprint | 12" x 15" (30.48 cm x 38.1 cm) | 12" x 15" (30.48 x 38.1 cm) |
| Computer | <ul style="list-style-type: none"> ▶ Operating system: Microsoft® Windows® 7 and above ▶ Minimum hardware requirements: Intel® processor, 1.4 GHz processor speed, 2 GB RAM, 16 GB free hard disk space, 2 USBs | <ul style="list-style-type: none"> ▶ Tablet included: Windows 10 tablet computer enables compatibility with existing networks, as well as easy setup ▶ Bluetooth and wireless compatible, or USB to LAN compatible ▶ 12" touch screen ▶ 256 GB of storage for short-term data saving |

Ordering Information

Axygen® Gel Documentation Systems and Accessories

| Cat. No. | Description | Qty/Pk | Qty/Cs |
|------------|---|--------|--------|
| GD-1000 | Gel Documentation System | 1 | 1 |
| GDBL-1000 | Gel Documentation System-BL | 1 | 1 |
| GD-BLCS | Gel Documentation System blue light conversion screen for GD-1000 | 1 | 1 |
| GD-WLCS | Gel Documentation System white light conversion screen for GD-1000 and GDBL-1000 | 1 | 1 |
| GD-GCT | Gel carrying tray for GD-1000 and GDBL-1000 | 1 | 1 |
| GDBL-PRT | Thermal printer | 1 | 1 |
| GD-PAPER | Thermal printer paper | 1 | 1 |
| GD-1D | 1 user license of Total Lab 1D (more user licenses available upon request) | 1 | 1 |
| GDBL-BLUE | Optional blue filter (497 nm) | 1 | 1 |
| GDBL-GREEN | Optional green filter (572 nm) | 1 | 1 |
| GD-GCS | UV transmitting tray that protects UV transilluminator when cutting out bands | 1 | 1 |
| GD-OG | Orange glasses ideal for reducing background when cutting out bands with blue light | 1 | 1 |
| GD-USBS | USB hub | 1 | 1 |
| GD-USBMK | USB mouse and keyboard | 1 | 1 |

Related Products

Axygen Gel Cutting Pipet Tips

| Cat. No. | Description | Qty/Pk | Qty/Cs |
|------------|--|--------|--------|
| TGL-1165 | 1.1 mm x 6.5 mm gel cutting pipet tips | 250 | 2,500 |
| TGL-1165-R | 1.1 mm x 6.5 mm gel cutting pipet tips | 480 | 2,400 |
| TGL-1140 | 1.1 mm x 4 mm gel cutting pipet tips | 250 | 2,500 |
| TGL-1140-R | 1.1 mm x 4 mm gel cutting pipet tips | 480 | 2,400 |

Axygen Gel Loading Pipet Tips

| | | | |
|------------------|---|-----|-----|
| TGL-10FT-17-R | 0.17 mm, 10 µL racked flat gel loading pipet tips | 400 | 400 |
| TGL-200FT-37-R-S | 0.37 mm, 200 µL racked flat gel loading pipet tips, sterile | 400 | 400 |
| TGL-200FT-37-R | 0.37 mm, 200 µL racked flat gel loading pipet tips | 400 | 400 |
| TGL-200RD-57-R-S | 0.57 mm, 200 µL racked round gel loading tips, sterile | 400 | 400 |
| TGL-200RD-57-R | 0.57 mm, 200 µL racked round gel loading tips | 400 | 400 |

Axygen DNA Markers

| | | | |
|-------------|---------------------------|---|---|
| M-DNA-100BP | 100 bp DNA ladder, 500 µL | 1 | 1 |
| M-DNA-1KB | 1 kb DNA ladder, 500 µL | 1 | 1 |

Axygen Agarose

| | | | |
|-------------|---|----|----|
| AGR-LE-100 | Agarose LE, low EEO, molecular biology grade, 100 g | 1 | 1 |
| AGR-LE-1001 | Agarose LE, low EEO, molecular biology grade, 100 g | 10 | 10 |
| AGR-LE-500 | Agarose LE, low EEO, molecular biology grade, 500 g | 1 | 1 |
| AGR-LE-5001 | Agarose LE, low EEO, molecular biology grade, 500 g | 10 | 10 |
| AGR-LM-50 | Agarose LM, low melting, molecular biology grade, 50 g | 1 | 1 |
| AGR-LM-501 | Agarose LM, low melting, molecular biology grade, 50 g | 10 | 10 |
| AGR-LM-100 | Agarose LM, low melting, molecular biology grade, 100 g | 1 | 1 |
| AGR-LM-1001 | Agarose LM, low melting, molecular biology grade, 100 g | 10 | 10 |
| AGR-MS-50 | Agarose MS, PCR screening, molecular biology grade, 50 g | 1 | 1 |
| AGR-MS-501 | Agarose MS, PCR screening, molecular biology grade, 50 g | 10 | 10 |
| AGR-MS-100 | Agarose MS, PCR screening, molecular biology grade, 100 g | 1 | 1 |
| AGR-MS-1001 | Agarose MS, PCR screening, molecular biology grade, 100 g | 10 | 10 |

Corning® Buffers


| | | | |
|-----------|--|----|---|
| 46-011-CM | TBE buffer, pH 8.4 ± 0.1, RNase-/DNase- and protease-free, 10X | 1L | 6 |
| 46-010-CM | TAE buffer, pH 8.3 ± 0.1, RNase-/DNase- and protease-free, 10X | 1L | 6 |

Axygen® Horizontal Gel Boxes

Axygen horizontal gel boxes are high quality, full featured units designed for exceptional durability and efficiency. The gel boxes feature leak-free external gel casting, which allows you to cast one gel outside of the box while another gel is running inside. The units are available in four different sizes, and each unit comes with two sizes of gel trays. In addition, they have easy to replace electrodes that are recessed to reduce potential damage. These gel boxes are an excellent value that will provide years of reliable service.

Features

- ▶ Flexibility – each unit comes with 2 sizes of gel trays to optimize applications.
- ▶ External gel casting to gel box allows for running gels while casting the next one.
- ▶ Ease of use – the Axygen contrast enhancer makes loading gels easier.
- ▶ Rugged injection molding is supported by a 3-year warranty.
- ▶ Larger units come with recirculation ports allowing for buffer exchange.

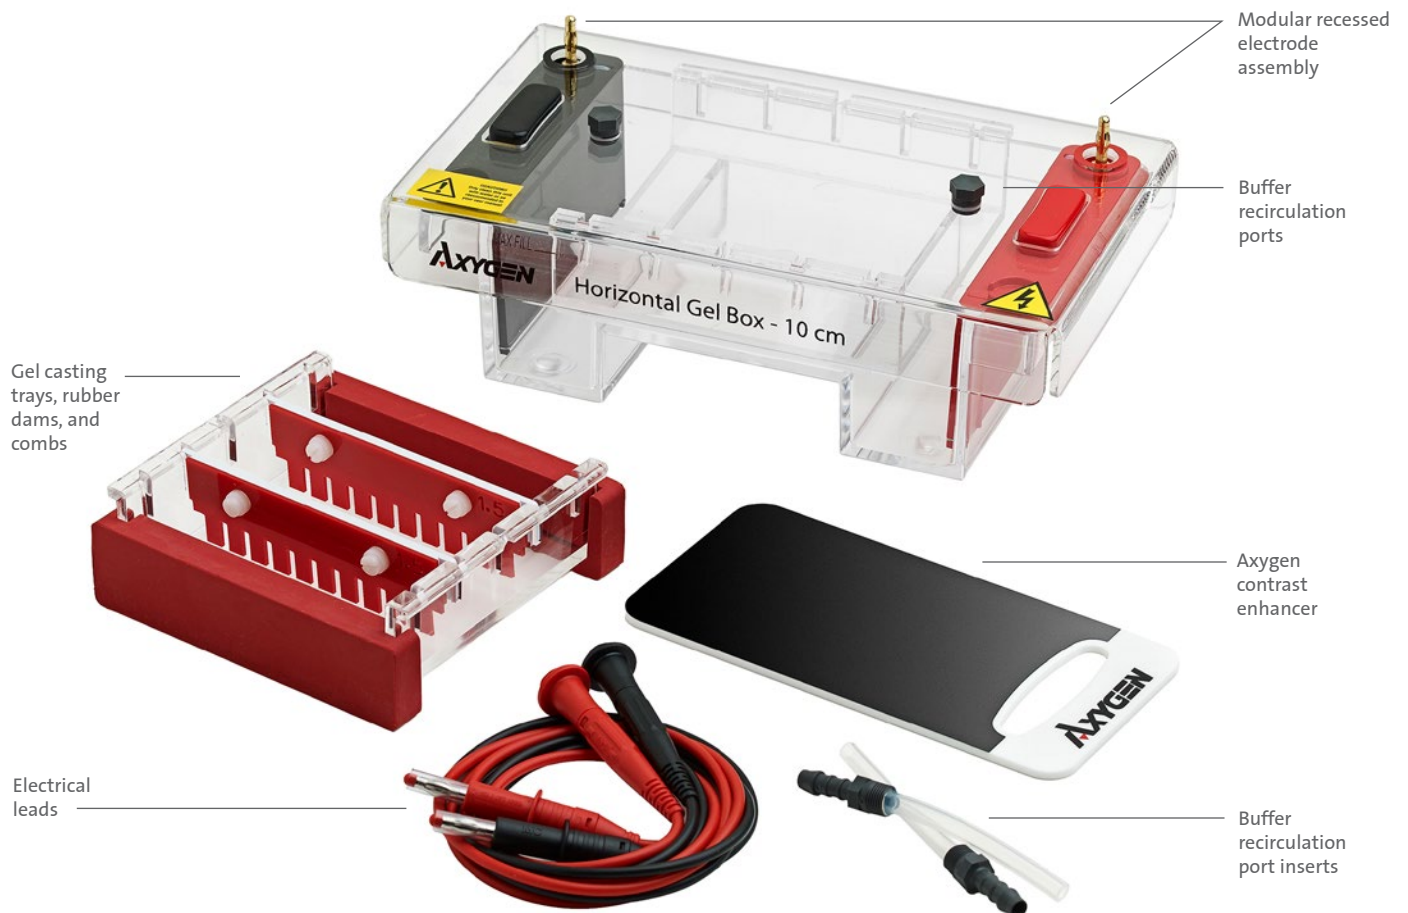

Axygen® Horizontal Gel Boxes

Four sizes of horizontal tanks. Each comes with 2 sizes of gel trays which allow for external gel casting. Three larger sizes come with recirculation ports for use as needed.



HGB-7

| | |
|---------------------|------------------------------|
| Tray sizes | 7 x 7 cm, 7 x 10 cm |
| Recirculation ports | No |
| Combs | 2 x 8 well, 1.5 mm thickness |



HGB-10

| | |
|---------------------|--|
| Tray sizes | 10 x 10 cm, 10 x 12 cm |
| Recirculation ports | Yes |
| Combs | 2 x 10 multi-channel compatible well, 1.5 mm thickness |



HGB-15

| | |
|---------------------|---|
| Tray sizes | 15 x 10 cm, 15 x 15 cm |
| Recirculation ports | Yes |
| Combs | 1 x 16 multi-channel compatible well, 1.5 mm thickness 1 x 20 well, 1.5 mm thickness |



HGB-20

| | |
|---------------------|--|
| Tray sizes | 20 x 20 cm, 20 x 25 cm |
| Recirculation ports | Yes |
| Combs | 2 x 20 multi-channel compatible well, 1.5 mm thickness 2 x 40 multi-channel compatible well, 1.5 mm thickness |

Ordering Information

Combs and Accessories

Axygen Horizontal Gel Box, 7 cm

| Cat. No. | Description | Qty/Cs |
|--------------|---|--------|
| HGB-7 | Axygen horizontal gel box, 7 cm | 1 |
| HGB7-5-15 | 5-well comb for use with 7 cm gel box, 1.5 mm thickness | 1 |
| HGB7-8-075 | 8-well comb for use with 7 cm gel box, 0.75 mm thickness | 1 |
| HGB7-8-1 | 8-well comb for use with 7 cm gel box, 1.0 mm thickness | 1 |
| HGB7-10-1 | 10-well comb for use with 7 cm gel box, 1.0 mm thickness | 1 |
| HGB7-10-15 | 10-well comb for use with 7 cm gel box, 1.5 mm thickness | 1 |
| HGB7-12MC-1 | 12-well multi-channel compatible comb for use with 7 cm gel box, 1.0 mm thickness | 1 |
| HGB7-12MC-15 | 12-well multi-channel compatible comb for use with 7 cm gel box, 1.5 mm thickness | 1 |
| HGB7-16-1 | 16-well comb for use with 7 cm gel box, 1.0 mm thickness | 1 |
| HGB7-16-15 | 16-well comb for use with 7 cm gel box, 1.5 mm thickness | 1 |

Axygen Horizontal Gel Box, 10 cm

| Cat. No. | Description | Qty/Cs |
|---------------|--|--------|
| HGB-10 | Axygen horizontal gel box, 10 cm | 1 |
| HGB10-8-1 | 8-well comb for use with 10 cm gel box, 1.0 mm thickness | 1 |
| HGB10-10MC-1 | 10-well multi-channel compatible comb for use with 10 cm gel box, 1.0 mm thickness | 1 |
| HGB10-10MC-15 | 10-well multi-channel compatible comb for use with 10 cm gel box, 1.5 mm thickness | 1 |
| HGB10-12-075 | 12-well comb for use with 10 cm gel box, 0.75 mm thickness | 1 |
| HGB10-12-1 | 12-well comb for use with 10 cm gel box, 1.0 mm thickness | 1 |
| HGB10-12-15 | 12-well comb for use with 10 cm gel box, 1.5 mm thickness | 1 |
| HGB10-16-075 | 16-well comb for use with 10 cm gel box, 0.75 mm thickness | 1 |
| HGB10-16-1 | 16-well comb for use with 10 cm gel box, 1.0 mm thickness | 1 |
| HGB10-16-15 | 16-well comb for use with 10 cm gel box, 1.5 mm thickness | 1 |
| HGB10-16-2 | 16-well comb for use with 10 cm gel box, 2.0 mm thickness | 1 |
| HGB10-20MC-1 | 20-well multi-channel compatible comb for use with 10 cm gel box, 1.0 mm thickness | 1 |
| HGB10-20MC-15 | 20-well multi-channel compatible comb for use with 10 cm gel box, 1.5 mm thickness | 1 |
| HGB10-25-1 | 25-well comb for use with 10 cm gel box, 1.0 mm thickness | 1 |
| HGB10-25-2 | 25-well comb for use with 10 cm gel box, 2.0 mm thickness | 1 |

Ordering Information (Continued)

Axygen® Horizontal Gel Box, 15 cm

| Cat. No. | Description | Qty/Cs |
|----------------|---|--------|
| HGB-15 | Axygen horizontal gel box, 15 cm | 1 |
| HGB15-8-15 | 8-well comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-10-1 | 10-well comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-10-15 | 10-well comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-12-1 | 12-well comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-12-15 | 12-well comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-14MC-1 | 14-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-14MC-15 | 14-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-14MC-2 | 14-well multi-channel compatible comb for use with 15 cm gel box, 2.0 mm thickness | 1 |
| HGB15-16-1 | 16-well comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-16MC-1 | 16-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-16MC-15 | 16-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-16MC-2 | 16-well multi-channel compatible comb for use with 15 cm gel box, 2.0 mm thickness | 1 |
| HGB15-18MC-1 | 18-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-18MC-15 | 18-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-20-075 | 20-well comb for use with 15 cm gel box, 0.75 mm thickness | 1 |
| HGB15-20-1 | 20-well comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-20-15 | 20-well comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-20-2 | 20-well comb for use with 15 cm gel box, 2.0 mm thickness | 1 |
| HGB15-28MC-075 | 28-well multi-channel compatible comb for use with 15 cm gel box, 0.75 mm thickness | 1 |
| HGB15-28MC-1 | 28-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-28MC-15 | 28-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-30MC-1 | 30-well multi-channel compatible comb for use with 15 cm gel box, 1.0 mm thickness | 1 |
| HGB15-30MC-15 | 30-well multi-channel compatible comb for use with 15 cm gel box, 1.5 mm thickness | 1 |
| HGB15-35-15 | 35-well comb for use with 15 cm gel box, 1.5 mm thickness | 1 |

Axygen Horizontal Gel Box, 20 cm

| Cat. No. | Description | Qty/Cs |
|----------------|--|--------|
| HGB-20 | Axygen horizontal gel box, 20 cm | 1 |
| HGB20-16-075 | 16-well comb for use with 20 cm gel box, 0.75 mm thickness | 1 |
| HGB20-20MC-075 | 20-well comb for use with 20 cm gel box, 0.75 mm thickness | 1 |
| HGB20-20MC-1 | 20-well multi-channel compatible comb for use with 20 cm gel box, 1.0 mm thickness | 1 |
| HGB20-20MC-15 | 20-well multi-channel compatible comb for use with 20 cm gel box, 1.5 mm thickness | 1 |
| HGB20-25-1 | 25-well comb for use with 20 cm gel box, 1.0 mm thickness | 1 |
| HGB20-30-1 | 30-well comb for use with 20 cm gel box, 1.0 mm thickness | 1 |
| HGB20-40MC-1 | 40-well multi-channel compatible comb for use with 20 cm gel box, 1.0 mm thickness | 1 |
| HGB20-40MC-15 | 40-well multi-channel compatible comb for use with 20 cm gel box, 1.5 mm thickness | 1 |
| HGB20-40MC-2 | 40-well multi-channel compatible comb for use with 20 cm gel box, 2.0 mm thickness | 1 |
| HGB20-50-2 | 50-well comb for use with 20 cm gel box, 2.0 mm thickness | 1 |

Gel Trays

| | | |
|-------------|--|---|
| HGB7-7-GT | Gel tray 7 x 7 cm for use with 7 cm gel box, UV transparent | 1 |
| HGB7-10-GT | Gel tray 7 x 10 cm for use with 7 cm gel box, UV transparent | 1 |
| HGB10-10-GT | Gel tray 10 x 10 cm for use with 10 cm gel box, UV transparent | 1 |
| HGB15-10-GT | Gel tray 15 x 10 cm for use with 15 cm gel box, UV transparent | 1 |
| HGB15-15-GT | Gel tray 15 x 15 cm for use with 15 cm gel box, UV transparent | 1 |
| HGB20-20-GT | Gel tray 20 x 20 cm for use with 20 cm gel box, UV transparent | 1 |

Replacement Electrodes

| | | |
|----------|---------------------------------------|---|
| HGB7-NE | Replacement negative electrode, 7 cm | 1 |
| HGB7-PE | Replacement positive electrode, 7 cm | 1 |
| HGB10-NE | Replacement negative electrode, 10 cm | 1 |
| HGB10-PE | Replacement positive electrode, 10 cm | 1 |
| HGB15-NE | Replacement negative electrode, 15 cm | 1 |
| HGB15-PE | Replacement positive electrode, 15 cm | 1 |
| HGB20-NE | Replacement negative electrode, 20 cm | 1 |
| HGB20-PE | Replacement positive electrode, 20 cm | 1 |

Rubber Casting Dams

| | | |
|----------|---|---|
| HGB7-CD | Casting dams for use with 7 cm gel box, set of 2 | 1 |
| HGB10-CD | Casting dams for use with 10 cm gel box, set of 2 | 1 |
| HGB15-CD | Casting dams for use with 15 cm gel box, set of 2 | 1 |
| HGB20-CD | Casting dams for use with 20 cm gel box, set of 2 | 1 |

Accessories

| | | |
|----------|---|---|
| HGB7-AD | Power supply adapters, 4 mm to 4 mm, 2/pk | 1 |
| HGB7-AD2 | Power supply adapters, 4 mm to 2 mm, 2/pk | 1 |
| HGB-EL | Electrical leads (1 pair) | 1 |

Axygen® Power Supplies



PS300GP and PS250HA Ideal for most of your electrophoresis needs

The Axxygen Power Supplies are full-featured power sources ideal for molecular biology workflows including DNA, RNA, and protein gel electrophoresis applications, as well as blotting. The compact user interface has 4 sets of color-coded terminals allowing for use with up to 4 gel boxes simultaneously. Depending on the model, operating modes include constant voltage, current, or power all with automatic crossover feature. The Power Supplies feature an easy to set, LCD backlit, digital display to perform according to the needs of your operational parameters. The PS250HA has the ability to set programs with 10 steps per program. Both units have timers, are stackable, and are engineered with safety in mind to meet the requirements that today's protocols demand.

PS250HA

- ▶ High amperage optimal for Western blotting
- ▶ Programmable

PS300GP

- ▶ Ideal for small format protein gels or DNA horizontal gels
- ▶ Easy to run constant mode for consistent Voltage or Amperage protocols

Specifications

| | Axygen PS250HA Power Supply | Axygen PS300GP Power Supply |
|--------------------------|---|---|
| Input Power (switchable) | 115 VAC, 50/60 Hz 230 VAC, 50/60 Hz | 115 VAC, 50/60 Hz 230 VAC, 50/60 Hz |
| Output power | 300W | 90W |
| Output voltage range | 5 to 250V | 2 to 300V |
| Output current range | 10 to 3000 mA | 4 to 500 mA |
| Timer | Approx. 99.99 hr./min. | Approx. 99.99 hr./min. |
| Terminal pairs | 4 positive voltage and 4 negative voltage | 4 positive voltage and 4 negative voltage |
| Operating Modes | Constant Voltage: 1V step Constant Current: 10 mA step Constant Power: 1W step | Constant Voltage: 1V increment settings Constant Current: 1 mA increment settings |
| Crossover | Automatic | Automatic |
| Pause function | Yes | Yes |
| Safety features | No Load Detection Load Change Detection Overload Detection Ground Leak Detection Auto Restart | No Load Detection Load Change Detection Overload Detection Ground Leak Detection Auto Restart |
| Programmable | Yes. Can store up to ten 10-step methods | No |
| Housing size (W x D x H) | 7.9 x 12.4 x 3.4 in. (20 x 31.4 x 8.5 cm) | 7.9 x 12.4 x 3.4 in. (20 x 31.4 x 8.5 cm) |
| Weight | 5.4 lbs. (2.45 kg) | 5.4 lbs. (2.45 kg) |
| Certifications | CE; cETLus | CE; cETLus |
| Warranty | 3 years | 3 years |

Ordering Information

Axygen® Power Supplies



| Cat. No. | Description |
|--------------|---|
| PS250HA | 250V high amperage power supply, 115V |
| PS250HA-230V | 250V high amperage power supply, 230V |
| PS300GP | 300V general purpose power supply, 115V |
| PS300GP-230V | 300V general purpose power supply, 230V |


*NOTE: The 115V and 230V in the product description refer to the plug type necessary to operate in your region.

Axygen Horizontal Gel Boxes



| Cat. No. | Description |
|----------|----------------------------|
| HGB-7 | Horizontal gel box (7 cm) |
| HGB-10 | Horizontal gel box (10 cm) |
| HGB-15 | Horizontal gel box (15 cm) |
| HGB-20 | Horizontal gel box (20 cm) |

Axygen Gel Documentation Systems



| Cat. No. | Description |
|-----------|--|
| GD-1000 | Gel documentation system |
| GDBL-1000 | Gel documentation system with Epi blue light |



Axygen® MaxyGene II Thermal Cyclers



The Axxygen MaxyGene II Thermal Cycler brings increased speed and advanced features, providing the premium performance you have come to expect from Axxygen brand products.

Features

- ▶ Unique flexible programming
- ▶ Rapid run times
- ▶ Improved workflow over traditional gradient cyclers
- ▶ Ramping rates up to 5°C/sec.
- ▶ Simple user interface
- ▶ Adjustable heated lid accommodates strips, tubes, and microplates
- ▶ Pre-programmed standard protocols
- ▶ 3-year warranty

Simplified Workflow for Improved Throughput

The Axxygen MaxyGene II Thermal Cycler is extremely simple to program, compact in design, and built to perform (Figure 1). It makes method optimization affordable and provides consistent, reliable results. Precision Thermal Control provides rapid heating and cooling of the precision-machined sample block by six independently temperature-controlled Peltier modules. A sophisticated algorithm program calculates sample temperature and triggers heating and cooling accordingly, minimizing over- and under-shooting.

The MaxyGene II Thermal Cycler may be programmed to operate between one and six different annealing temperatures across the block (Figure 2). This thermal cycler provides improved throughput by reducing time and simplifies workflow by reducing steps.

Figure 1. MaxyGene Thermal Cycler Screen


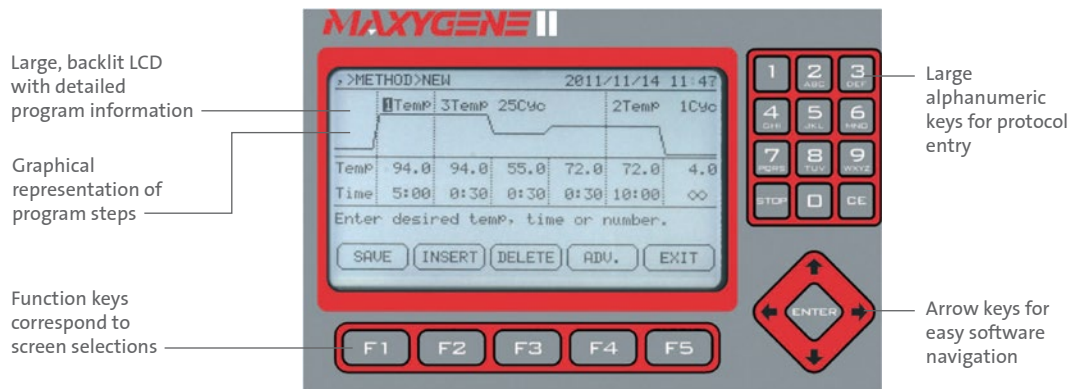


Figure 2. Primers designed to anneal to various genes (e.g., Gene A, B, and C) typically have different annealing temperatures (T_1 , T_2 , and T_3). The Axxygen MaxyGene II thermal cycler can perform up to six different reactions, significantly reducing steps and time.

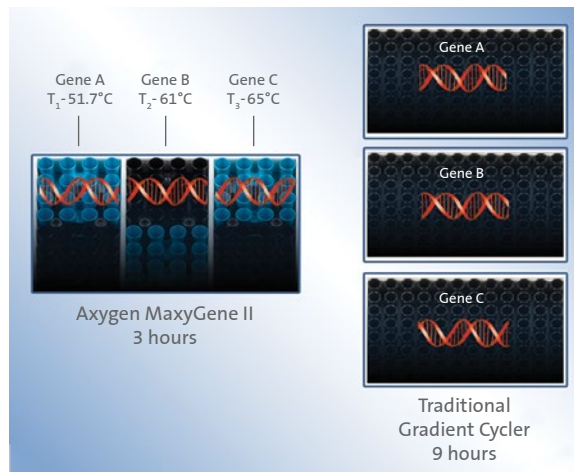

A variety of applications can be performed with the Axygen® MaxyGene II thermal cycler, from single temperature soaks to sophisticated multi-step programs. All of these are easily set up. The time or temperature of a cycling step can be automatically increased or decreased during successive cycles. This is useful for “touchdown” applications and for extending annealing times as enzyme is depleted. Programs may also be paused while running. During operation, actual times and temperatures are displayed. Estimated run times are automatically calculated, and a log of the last run can be displayed or downloaded to a printer or PC.

Specifications

| | |
|---|--|
| Sample Capacity | 1 x 96-well microplate, 12 x 8 x 0.2 mL strip tubes, 96 x 0.2 mL tubes |
| Programmable Temp. Range | 4°C to 99.9°C |
| Temperature Control | Calculated or block |
| Temp. Accuracy/Uniformity | ±0.5°C/±0.5°C |
| Max. Heating Range among the 6 Peltier Blocks | 30°C to 99°C |
| Max. Temperature Difference | 24°C |
| Ramp Rates | 5°C/sec. heating, 3.5°C/sec. cooling |
| Optimization Technology | Six 4 x 4 Peltier blocks with independently programmable temperatures |
| Programmable Lid Temperature | 60°C to 65°C, 100°C to 115°C |
| Program Memory | 200 complete programs |
| Temp. Increments/Decrements | Yes |
| Time Increments/Decrements | Yes |
| User Program Folders | Yes |
| Password Protected Programs | Yes |
| Communication | USB and RS232 ports |
| Dimensions (W x D x H) | 9.4 x 16.9 x 9.8 in. (24 x 43 x 25 cm) |
| Weight | 19.8 lbs. (9 kg) |
| Electrical | 120V or 240V, 50/60 Hz |


Ordering Information

Axygen MaxyGene II Thermal Cyclers

| Cat. No. | Description | Qty/Pk | Qty/Cs |
|------------|---|--------|--------|
| THERM-1001 | MaxyGene II Thermal Cycler with 96-well block, 120V | – | 1 |
| THERM-1000 | MaxyGene II Thermal Cycler with 96-well block, 230V | – | 1 |

Compatible Axygen PCR Products

| | | | |
|-------------------|---|-------|--------|
| PCR-0208-C | 0.2 mL clear thin wall PCR 8-strip tubes | 125 | 1,250 |
| PCR-0208-CP-C | 0.2 mL clear thin wall PCR 8-strip tubes and clear 8-strip domed caps | 125 | 1,250 |
| PCR-0208-FCP-C | 0.2 mL clear thin wall PCR 8-strip tubes and clear flat 8-strip caps with writing surface | 125 | 1,250 |
| PCR-02-C | 0.2 mL clear flat cap thin wall PCR tubes | 1,000 | 10,000 |
| PCR-02D-C | 0.2 mL clear domed cap thin wall PCR tubes | 1,000 | 10,000 |
| PCR-02-FCP-C | 0.2 mL clear flat PCR 8-strip caps with writing surface | 125 | 1,250 |
| PCR-2CP-RT-C | 0.2 mL clear 8-strip flat caps for real-time PCR | 125 | 1,250 |
| PCR-96-FLT-C | 96-well clear flat top non skirt PCR microplate | 25 | 100 |
| PCR-96-FS-C | 96-well clear full skirt PCR microplate | 10 | 50 |
| PCR-96-FS-C-PBC | 96-well clear full skirt PCR microplate with bar code | 10 | 50 |
| PCR-96M2-HS-C | 96 well clear half skirt PCR microplate with a single notch | 10 | 50 |
| PCR-96M2-HS-C-PBC | 96-well clear half skirt PCR microplate with a single notch with barcode | 10 | 50 |
| PCR-TS | PCR tight seal thermal sealing film for all thermal cyclers | 100 | 500 |
| UC-500 | Ultra clear pressure sensitive sealing film | 100 | 500 |



Axygen® PlateMax™ Semi-automatic Plate Sealers



Easy-to-set time and temperature settings

Compact Footprint

The Axygen PlateMax semi-automatic plate sealer is ideal for the low to medium throughput laboratory that requires uniform and consistent sealing of microplates. Sealing parameters are set and displayed via the user-friendly control panel and the sealing operation is automated to ensure consistent results.

Intuitive Layout

The PlateMax sealer control system features an intuitive layout with settings for all types of plates and sealing materials. The Mode button selects sealing time or temperature, and the control knob adjusts the setting.

Temperature can be precisely set in increments of 1°C and time in increments of 0.1 seconds. The PlateMax has a power saving option that turns the heater off if not in use. For those labs that choose to turn this function off, you can have the PlateMax ready to run all day.

- ▶ Accepts a wide range of microplates and heat seals
- ▶ User-friendly control system
- ▶ Large digital display shows all operating parameters
- ▶ Adjustable sealing temperature
- ▶ Precise temperature, timing, and pressure for consistent sealing

Simple 3-step Operation

1. Set time and temperature.
2. Place a microplate in the open drawer.
3. Place a heat seal on top of the plate and press the "SEAL" button.

Versatile and Convenient

The PlateMax sealer accepts a wide variety of plate types and heights. An aluminum adapter is used for PCR and standard assay plates. The motorized heated platen automatically adjusts for different plate heights and provides uniform pressure to ensure a quality seal. The platen incorporates a special non-stick coating. The side access door allows for easy cleaning.

Safe

The internal heating elements are situated inside the instrument casing and an internal safety door prevents access to the heated area. In addition, the motorized drawer features safety switches. If a hand or object obstructs the closing drawer, the drawer motor will reverse. This feature protects both the user and the instrument.

Specifications

| | |
|-------------------------------|---|
| Dimensions (W x D x H) | 6.75 x 12.75 x 14.25 in. (171 x 324 x 362 mm) |
| Weight | 27 lbs. (12 kg) |
| Sealing Temperature | OFF, 100°C to 190°C (increments of 1.0°C) |
| Temperature Accuracy | ±1.0°C |
| Temperature Uniformity | ±1.0°C |
| Sealing Time | 0.5 to 10 sec. (increments of 0.1 sec) |
| Compatible Plate Materials | PP (Polypropylene), PS (Polystyrene), PE (Polyethylene) |
| Compatible Plate Types | Standard assay plates, deep-well storage plates, PCR plates: skirted, semi-skirted, non-skirted |
| Maximum Plate Height | 45 mm |
| Compatible Sealing Film Types | Foil-polypropylene laminate Clear polyester-polypropylene laminate Clear polymer Thin clear polymer Foil-laminate Foil |

Ordering Information

Axygen® PlateMax™ Semi-automatic Plate Sealers

| Cat. No. | Description | Qty/Pk | Qty/Cs |
|----------|--|--------|--------|
| HS-1120 | PlateMax semi-automatic plate sealer, 120V, includes adapters for standard and deep-well microplates | – | 1 |
| HS-1230 | PlateMax semi-automatic plate sealer, 230V, includes adapters for standard and deep-well microplates | – | 1 |

Related Products

| Cat. No. | Description | Qty/Pk | Qty/Cs |
|-------------|---|--------|--------|
| HS-100-QPCR | PlateMax ultra clear permanent heat sealing film for qPCR | 100 | 5 |
| HS-150-QPCR | PlateMax ultra clear peelable heat sealing film for qPCR | 100 | 5 |
| HS-200 | PlateMax peelable heat sealing film for low temperature compound storage and PCR | 100 | 5 |
| HS-300 | PlateMax pierceable heat sealing film for low temperature compound storage and PCR | 100 | 5 |
| HS-400 | PlateMax peelable heat sealing film for compound storage | 100 | 5 |
| MF-300 | PlateMax peelable heat sealing film with paper backing for general storage and PCR applications | 100 | 1 |

Axygen® Axyspin Refrigerated Microcentrifuges



The Axxygen Axyspin refrigerated microcentrifuge is a high performance refrigerated microcentrifuge designed to quickly process samples for applications such as nucleic acid and protein preparation, purifications, extractions, and pelleting.

- ▶ Powerful refrigeration system cools to 4°C in 8 minutes
- ▶ 24 x 1.5/2.0 mL aluminum rotor included
- ▶ Exceptionally quiet and compact

Axygen Axyspin Refrigerated Microcentrifuge

The Axxygen Axyspin refrigerated microcentrifuge combines a powerful yet silent, brushless drive with an efficient cooling system, all in a compact footprint. Brushless drive technology has been fine-tuned in the Axyspin refrigerated microcentrifuge to deliver fast acceleration and deceleration of the solid aluminum rotor. The uniquely designed 24-place rotor allows easy access to the tops of sample tubes. Starting from room temperature, the chamber of the Axyspin refrigerated microcentrifuge cools to 4°C in just 8 minutes. The control panel features a backlit LCD display, which allows users to easily view running parameters while the large control knob facilitates digital setting of rotor speed, run time, and temperature. These high performance features allow for faster sample processing and less down time.

The rotor of the Axyspin refrigerated microcentrifuge can accommodate 1.5 and 2.0 mL Axxygen microcentrifuge tubes, including the most popular catalog numbers (MCT-150-C and MCT-200-C).

Specifications

| | |
|------------------------|--|
| Speed Range | 500 to 13,500 rpm |
| Maximum RCF | 17,135 x g |
| Maximum Capacity | 24 x 1.5/2.0 mL |
| Timer | 0.5 to 99 minutes, or continuous 0.5 to 99 minutes, or continuous "Quick" button for momentary operation |
| Temperature Range | -10° to 40°C |
| Dimensions (W x D x H) | 10.9 x 17.75 x 9.75 in. (27.7 x 45 x 24.75 cm) |
| Weight | 44 lbs. (20 kg) |
| Electrical | 100V-230V, 50/60 Hz |

Ordering Information

Axygen Axyspin Refrigerated Microcentrifuges

| Cat. No. | Voltage | Plug Type | Qty/Cs |
|------------|---------|-----------|--------|
| 601-05-031 | 120V | US | 1 |
| 601-05-021 | 230V | EU/UK | 1 |
| 601-05-011 | 100V | US | 1 |

Axygen Axyspin MaxyClear SnapLock Microcentrifuge Tubes


| Cat. No. | Description | Qty/Pk | Qty/Cs |
|-----------|-------------|--------|--------|
| MCT-150-C | 1.5 mL | 500 | 5,000 |
| MCT-200-C | 2.0 mL | 500 | 5,000 |

Axygen® Axyspin Mini Plate Spinner Centrifuges



The Axygen Axyspin Plate Spinner is the first centrifuge designed specifically for quick and easy centrifugation of samples in PCR plates.

- ▶ Capacity for two standard PCR plates
- ▶ Top loading design
- ▶ Exceptionally small footprint
- ▶ Starts and stops in seconds



Specifications

| | |
|-------------------------|---------------------------------|
| Speed | 2,500 rpm |
| Maximum RCF | 500 x g |
| Maximum Capacity | 2 standard PCR microplates |
| Ambient Operating Range | 4°C to 35°C |
| Dimensions | 6 x 6 x 7 in. (16 x 16 x 18 cm) |
| Weight | 3.3 lbs. (1.5 kg) |

Ordering Information

Axygen Axyspin Mini Plate Spinner Centrifuges

| Cat. No. | Voltage | Plug Type | Qty/Cs |
|--------------------|-----------|-----------|--------|
| Platespinner-120 | 120V/60Hz | US | 1 |
| Platespinner-230EU | 230V/50Hz | EU | 1 |
| Platespinner-230UK | 230V/50Hz | UK | 1 |
| Platespinner-230AU | 230V/50Hz | AU | 1 |
| Platespinner-100JP | 100V/60Hz | US | 1 |

For related PCR products, see page 10.

Axygen® Axypet® Pro Single- and Multi-channel Pipettors



Axygen Axypet Pro Pipettors have been engineered to provide the highest levels of comfort, accuracy, and precision. The lightweight construction, contoured handle, and 4-digit counter were designed to ensure comfortable pipetting. All pipettors feature smooth plunger movement and extremely low pipetting forces to reduce wrist strain and fatigue (RSI). Colored pushbuttons enable easy size identification and reduce the risk of cross-contamination.

- Ergonomic handle design is a perfect fit for both the right and left hand
- Convenient one-hand volume setting with auto-lock system prevents accidental volume change during work
- 4-digit counter provides greater precision and is perfectly positioned for visibility at all times
- Single-channel pipettors are compatible with very narrow tubes
- Fully autoclavable and UV-resistant for sample protection against contaminations
- The multi-channel shafts retract individually for perfect tip loading and easier tip ejection
- Unique ejector lever system enables effortless tip ejection
- Easy in-lab calibration helps you quickly adjust your pipettor to various liquid types
- Individually tested and supplied with a certificate of quality
- 3-year warranty

Axygen Axypet Pro Starter Kit

Axygen Axypet Pro Starter Kit contains four variable volume pipettors in the most popular and universal volumes (0.5-10 µL, 2-20 µL, 20-200 µL, and 100-1000 µL), pipettor stand for four pipettors, and 3 racks with tips.

Ordering Information

Axygen Axypet Pro Pipettors

Single-channel

| Cat. No. | Volume Range (µL) | Accuracy (%) | Precision (%) | Non-filtered Tip (µL) | Qty/Cs |
|-----------|-------------------|---------------|---------------|-----------------------|--------|
| AP-2-P | 0.1 - 2 | ±40.0 to ±1.5 | ≤12.0 to ≤0.7 | 10 | 1 |
| AP-10-P | 0.5 - 10 | ±4.0 to ±1.0 | ≤2.8 to ≤0.4 | 10 | 1 |
| AP-20-P | 2 - 20 | ±3.5 to ±0.8 | ≤1.5 to ≤0.3 | 200 | 1 |
| AP-50-P | 5 - 50 | ±3.5 to ±0.8 | ≤1.3 to ≤0.3 | 200 | 1 |
| AP-100-P | 10 - 100 | ±3.0 to ±0.8 | ≤1.0 to ≤0.2 | 200 | 1 |
| AP-200-P | 20 - 200 | ±2.0 to ±0.6 | ≤0.7 to ≤0.2 | 200 | 1 |
| AP-1000-P | 100 - 1000 | ±2.5 to ±0.6 | ≤0.6 to ≤0.2 | 1000 | 1 |

8-channel

| | | | | | |
|------------|----------|---------------|--------------|---------|---|
| AP-8-10-P | 0.5 - 10 | ±10.0 to ±2.0 | ≤8.0 to ≤1.2 | 10 | 1 |
| AP-8-50-P | 5 - 50 | ±4.0 to ±1.6 | ≤2.5 to ≤0.6 | 200 | 1 |
| AP-8-200-P | 10 - 200 | ±5.0 to ±1.0 | ≤3.0 to ≤0.6 | 200/300 | 1 |
| AP-8-300-P | 30 - 300 | ±3.0 to ±1.0 | ≤1.5 to ≤0.6 | 300 | 1 |

12-channel

| | | | | | |
|-------------|----------|---------------|--------------|---------|---|
| AP-12-10-P | 0.5 - 10 | ±10.0 to ±2.0 | ≤8.0 to ≤1.2 | 10 | 1 |
| AP-12-50-P | 5 - 50 | ±4.0 to ±1.6 | ≤2.5 to ≤0.6 | 200 | 1 |
| AP-12-200-P | 10 - 200 | ±5.0 to ±1.0 | ≤3.0 to ≤0.6 | 200/300 | 1 |
| AP-12-300-P | 30 - 300 | ±3.0 to ±1.0 | ≤1.5 to ≤0.6 | 300 | 1 |

Axygen Axypet Pro Starter Kit

| Cat. No. | Description | Qty/Cs |
|--------------|---|--------|
| AP-STR-KIT-P | Axygen Axypet Pro Starter Kit Includes: 4 single-channel pipettors: 0.5 to 10 µL (Cat. No. AP-10-P), 2 to 20 µL (Cat. No. AP-20-P), 20 to 200 µL (Cat. No. AP-200-P), 100 to 1000 µL (Cat. No. AP-1000-P); universal linear stand for four single-channel pipettors (Cat. No. AP-USD4-P); Axxygen MultiRack pipet tips: 10 µL (Cat. No. MR-10XT-R), 200 µL (Cat. No. MR-200-R), 1000 µL (Cat. No. MR-1000XT-R) | 1 |



Axygen Axypet Pro Starter Kit

Axygen® Axypet® Single- and Multi-channel Pipettors



Axygen Axypet single- and 8-channel pipettors



Axygen Axypet 12-channel pipettor

Axygen Axypet pipettors combine high levels of accuracy and precision with design innovations to make pipetting more comfortable during prolonged periods of time.

- ▶ Thumb-friendly soft spring pipetting system reduces fatigue
- ▶ Unique side EZject button option reduces thumb movement*
- ▶ Large ergonomic push button is easy on the thumb during contact
- ▶ Locking feature prevents accidental volume changes during pipetting procedures
- ▶ Micrometer is continuously adjustable for selection of whole or fractional volumes

Additional multi-channel pipettor features:

- ▶ Curved ejector bar allows tips to be ejected in steps, reducing the amount of force required for ejection
- ▶ Tip manifold rotates 360°
- ▶ Shafts withdraw when pressed against a row of tips
- ▶ Each shaft moves independently, minimizing jamming of tips

Ordering Information

Axygen Axypet Single- and Multi-channel Pipettors

Single-channel Pipettors

| Cat. No. | Volume Range (µL) | Channels | Accuracy (Min./Max.) | Precision (Min./Max.) | Non-filtered Tip (µL) | Qty/Cs |
|----------|-------------------|----------|----------------------|-----------------------|-----------------------|--------|
| AP-2 | 0.1 - 2 | 1 | ±40.0/±1.5% | ≤12.0/≤0.7% | 10 | 1 |
| AP-10 | 0.5 - 10 | 1 | ±4.0/±0.5% | ≤2.8/≤0.4% | 10 | 1 |
| AP-20 | 2 - 20 | 1 | ±3.0/±0.8% | ≤1.5/≤0.3% | 200 | 1 |
| AP-50 | 5 - 50 | 1 | ±2.5/±0.8% | ≤2.0/≤0.4% | 200 | 1 |
| AP-100 | 10 - 100 | 1 | ±1.6/±0.8% | ≤0.8/≤0.2% | 200 | 1 |
| AP-200 | 20 - 200 | 1 | ±1.2/±0.6% | ≤0.6/≤0.2% | 200 | 1 |
| AP-250 | 50 - 250 | 1 | ±1.0/±0.6% | ≤0.4/≤0.3% | 300 | 1 |
| AP-1000 | 100 - 1,000 | 1 | ±1.6/±0.6% | ≤0.4/≤0.15% | 1,000 | 1 |
| AP-5000 | 1,000 - 5,000 | 1 | ±0.6/±0.5% | ≤0.25/≤0.15% | 5,000 | 1 |
| AP-10ML | 1,000 - 10,000 | 1 | ±2.5/±0.5% | ≤0.6/≤0.2% | 10,000 | 1 |

Multi-channel Pipettors

| | | | | | | |
|-----------|----------|----|-------------|------------|---------|---|
| AP-8-10 | 0.5 - 10 | 8 | ±10.0/±2.0% | ≤8.0/≤1.2% | 10 | 1 |
| AP-8-50 | 5 - 50 | 8 | ±4.0/±1.6% | ≤2.5/≤0.6% | 200 | 1 |
| AP-8-200 | 20 - 200 | 8 | ±3.0/±1.0% | ≤1.5/≤0.6% | 200/300 | 1 |
| AP-8-300 | 50 - 300 | 8 | ±1.6/±1.0% | ≤1.5/≤0.6% | 300 | 1 |
| AP-12-10 | 0.5 - 10 | 12 | ±10.0/±2.0% | ≤8.0/≤1.2% | 10 | 1 |
| AP-12-50 | 5 - 50 | 12 | ±4.0/±1.6% | ≤2.5/≤1.6% | 200 | 1 |
| AP-12-200 | 20 - 200 | 12 | ±3.0/±1.0% | ≤1.5/≤0.6% | 200/300 | 1 |
| AP-12-300 | 50 - 300 | 12 | ±1.6/±1.0% | ≤1.5/≤0.6% | 300 | 1 |

*Left handed EZject button available by special order.

Axygen Axypet Starter Kits

| Cat. No. | Description | Qty/Cs |
|--------------|--|--------|
| AP-STR-KIT-1 | Axygen Axypet Starter Kit-1 Includes: AP-20, AP-200, and AP-1000 pipettors; Axygen MultiRack pipet tips: 200 µL (Cat. No. MR-200-R), 1000 µL (Cat. No. MR-1000XT-R); calibration tool; ejector spacers set; identification labels; lubricant; color identification rings; right-hand ejector button | 1 |
| AP-STR-KIT-2 | Axygen Axypet Starter Kit-2 Includes: AP-10, AP-100, and AP-1000 pipettors; Axygen MultiRack pipet tips: 10 µL (Cat. No. MR-10XT-R), 200 µL (Cat. No. MR-200-R), 1000 µL (Cat. No. MR-1000XT-R); calibration tool; ejector spacers set; identification labels; lubricant; color identification rings; right-hand ejector button | 1 |



Axygen Axypet starter kit

Axygen® Axypet® Pipettor Accessories

| Cat. No. | Description | Qty/Cs |
|-----------|--|--------|
| AP-USD | Pipettor stand for one single-channel, 8-channel, or 12-channel pipettor | 1 |
| AP-USD4 | Universal linear stand for four pipettors, transparent (four single-channel, maximum of two 8-channel or 12-channel pipettors) | 1 |
| AP-USD4-P | Universal linear stand for four pipettors, red (four single-channel, maximum of two 8-channel or 12-channel pipettors) | 1 |
| AP-USD6 | Universal linear stand for six pipettors, transparent (six single-channel, maximum of three 8-channel or 12-channel pipettors) | 1 |
| AP-CSD | Carousel stand for six single-channel pipettors (not compatible with Axxygen Axypet Pro pipettors) | 1 |



Universal linear 4-place stand (Cat. No. AP-USD4)



Carousel stand for six single-channel pipettors (Cat. No. AP-CSD)



Universal linear stand for one pipettor (Cat. No. AP-USD)



Universal linear stand for four pipettors (Cat. No. AP-USD4-P)



Universal linear stand for six pipettors (Cat. No. AP-USD6)

Axygen® MotoPet™ Pipet Controller



Pressure sensitive trigger buttons control rate of aspiration or dispensing.

Axygen MotoPet is a precise, motor powered, rechargeable pipet controller for volumes ranging from 0.5 mL to 100 mL. The unit has an ergonomic design and a highly efficient motor for fast aspiration and dispense of samples as large as 100 mL and full control and precision while dispensing volumes as small as 0.5 mL. It is compatible with both glass and plastic pipets.

Features

- ▶ Molded, lightweight handle for effortless pipetting even during extended use.
- ▶ Easily accessible switches allow you to choose the optimal operation mode depending on the volume and viscosity of the sample.
- ▶ PTFE filter prevents liquid from entering the unit.

Specifications

| | |
|------------------|--|
| Volume Range | 0.5 mL to 100 mL |
| Weight | 230 g |
| Speed Settings | 2 (high and low) |
| Dispensing Modes | 2 (gravity and blow-out) |
| Filter | PTFE |
| Power Source | NiMH battery, up to 8 hours of continuous work |
| Sterilization | Nose piece, pipet holder, and filter are autoclavable. |



Battery charging station included.



PTFE filter protects samples from cross-contamination. The filter is autoclavable.



Digital display provides visual indication of battery condition, motor speed, and operating function.



Aspiration speed can be set to HIGH or LOW to adjust for the volume of the pipet and viscosity of the liquid.

Ordering Information

Axygen MotoPet Pipet Controller

| Cat. No. | Description | Qty/Cs |
|-----------|---|--------|
| MOTOPET-1 | MotoPet cordless pipet controller, includes charging stand, wall hanger, and PTFE filter (0.2 µm) | 1 |

Spare Parts

| Cat. No. | Description | Qty/Cs |
|----------------|----------------------------|--------|
| MOTO-SP-CONE | Nose piece | 1 |
| MOTO-SP-FLTR-1 | PTFE filter, 0.2 µm | 5 |
| MOTO-SP-FLTR-2 | PTFE filter, 0.45 µm | 5 |
| MOTO-SP-HLDR | Pipet holder | 1 |
| MOTO-SP-PWR | Charger 9V: EU, US, UK, AU | 1 |

Axygen® Storage Boxes and Microcentrifuge Tube Rack



TR8300

Axygen Storage Boxes

Axygen Storage Boxes are ideal for sample storage. These polypropylene boxes are engineered to withstand the harsh environments necessary for daily workflows in your laboratory. This includes freezing temperatures at -80°C and autoclaving temperatures up to 121°C to ensure a lasting, durable product. The positive catch on the product anterior keeps the lid securely fastened, whereas the 3-point hinge functions to maintain its integrity during repeated use located on the product posterior. Sample identification can easily be assigned using the alpha-numeric indexing stamped on the inner perimeter of each box. The clear lids allow visibility when the lid is closed as this feature pairs well with our microcentrifuge tubes solution noted within the accessories section. Boxes are available in a variety of colors for coding samples and holds 100 x 1.5 to 2.0 mL tubes, cryogenic vials, or chromatography vials. A solid black box, including the lid, is available for light-sensitive samples (142 x 142 x 55 mm).

Key Features

- Supports freezing at -80°C and autoclaving at 121°C
- Alpha-numeric sample identification
- 100 x 1.5 to 2.0 mL tube capacity



TR8300-BLK

Axygen Microcentrifuge Tube Rack

Axygen Microcentrifuge Tube Rack is molded from durable, autoclavable polypropylene, and features non-skid rubber feet. The rack has two levels and exhibits wide spacing to provide prime sample access and visibility. Tube positions are numbered 1 to 20 for organizing samples (210 x 75 x 35 mm).

Key Features

- Step design allows easy access to tubes
- 2 rows of 10 (20 x 1.5 to 2.0 mL total)



TR8300-B

Ordering Information

Axygen Microcentrifuge Tube Storage Boxes and Rack


| Cat. No. | Description | Qty/Cs |
|------------|---|--------|
| TR8300 | 100 place microcentrifuge tube box, natural, 1.5 to 2.0 mL | 5 |
| TR8300-BLK | 100 place microcentrifuge tube box, opaque black, 1.5 to 2.0 mL | 2 |
| TR8300-B | 100 place microcentrifuge tube box, blue, 1.5 to 2.0 mL | 5 |
| TR8300-A | 100 place microcentrifuge tube box, multi-color pack, 1.5 to 2.0 mL | 5 |
| TR8210 | Microcentrifuge tube support rack, red, 20 x 1.5 to 2.0 mL | 2 |



TR8300-A



TR8210

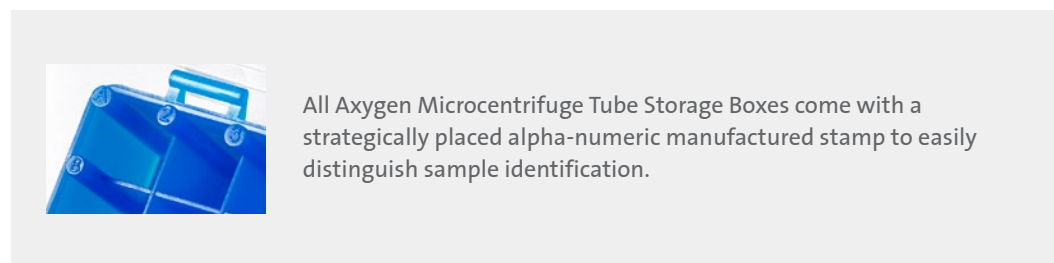

For more specific information on claims, visit www.corning.com/certificates.

Warranty/Disclaimer: Unless otherwise specified, all products are for research use or general laboratory use only. Not intended for use in diagnostic or therapeutic procedures. Corning Life Sciences makes no claims regarding the performance of these products for clinical or diagnostic applications.

CORNING

Corning Incorporated
Life Sciences

www.corning.com/lifesciences

NORTH AMERICA

t 800.492.1110
t 978.442.2200

ASIA/PACIFIC

Australia/New Zealand
t 61 427286832
Chinese Mainland
t 86 21 3338 4338

India

t 91 124 4604000

Japan

t 81 3-3586 1996

Korea

t 82 2-796-9500

Singapore

t 65 6572-9740

Taiwan

t 886 2-2716-0338

EUROPE

CSEurope@corning.com

France

t 0800 916 882

Germany

t 0800 101 1153

The Netherlands

t 020 655 79 28

United Kingdom

t 0800 376 8660

All Other European Countries

t +31 (0) 206 59 60 51

LATIN AMERICA

grupoLA@corning.com

Brazil

t 55 (11) 3089-7400

Mexico

t (52-81) 8158-8400